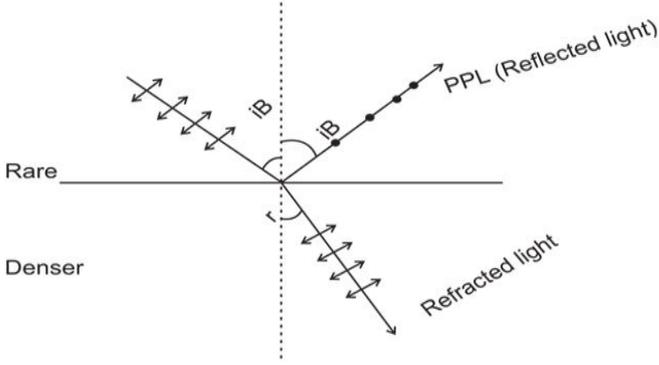
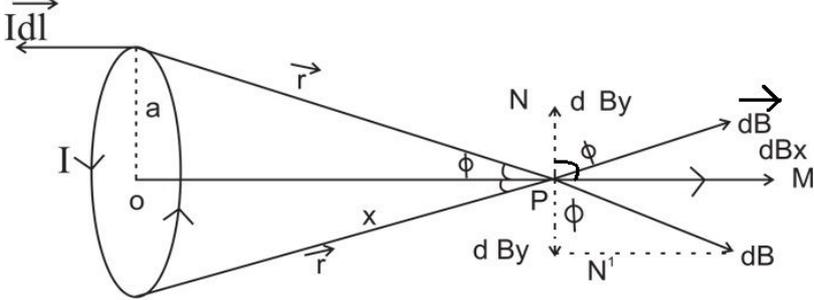
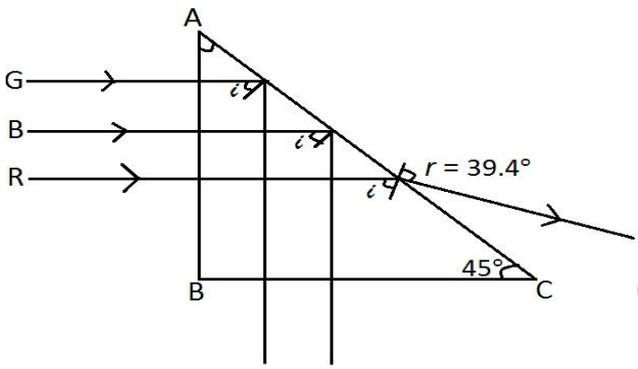


Class -XII
PHYSICS
SQP Marking Scheme
2019-20

Section - A		
1.	a, $\phi = \frac{q}{6\epsilon_0}$ (for one face)	1
2.	b, Conductor	1
3.	a, 1Ω .	1
4.	c, 12.0kJ	1
5.	a, speed	1
6.	d, virtual and inverted	1
7.	a, straight line	1
8.	d, 60°	1
9.	b, work function	1
10.	b, third orbit	1
11.	45° or vertical	1
12.	2 H	1
13.	double	1
14.	1.227A°	1
15.	60°	1
16.	Difference in initial mass energy and energy associated with mass of products Or Total Kinetic energy gained in the process	1
17.	Increases	1
18.	$N_0/8$	1
19.	0.79eV	1
20.	Diodes with band gap energy in the visible spectrum range can function as LED	1

23.	<p>Gain in KE of particle = Qv</p> $\frac{1}{2} m_p v_p^2 = K_p = q_p V_p \text{ ----- (i) } V_p = V_\alpha = V$ $\frac{1}{2} m_\alpha v_\alpha^2 = K_\alpha = q_\alpha V_\alpha \text{ ----- (ii)}$ <p>(ii)/(i)</p> $\frac{m_p v_p^2}{m_p v_p^2} = \frac{q_\alpha}{q_p} = \frac{2}{1}$ $\frac{v_\alpha^2}{v_p^2} = \frac{m_p \times 2}{m_\alpha \times 1} = \frac{2m_p}{4m_p \times 1} = \frac{1}{2}$ $V_\alpha : V_p = 1 : \sqrt{2}$	1 1
24.	<p>“The angle of incidence at which the reflected light is completely plane polarized, is called as Brewster’s angle (i_B)”</p>  <p>At $i = i_B$, reflected beam \perp to refracted beam $\therefore i_B + r = 90 \Rightarrow r = 90 - i_B$</p> <p>Using snell’s law</p> $\frac{\sin i}{\sin r} = \mu$ $\frac{\sin i_B}{\sin (90 - i_B)} = \mu \Rightarrow \frac{\sin i_B}{\cos i_B} = \mu$ $\mu = \tan i_B$	1 1
25.	<p>wave function</p> $\omega = 2.14\text{eV}$ <p>(a) Threshold frequency $\omega = h\nu_0$</p> $\nu_0 = \frac{\omega}{h} = \frac{2.14 \times 1.6 \times 10^{-19}}{6.62 \times 10^{-34}}$	1

	<p>decreased and hence potential gradient 'k' will also be decreased. Thus the null point or balance point will shift to right (towards, B) side.</p>	
<p>29.</p>	 <p>According to Biot-Savart's law, magnetic field due to a current element is given by</p> $\vec{dB} = \frac{\mu_0 I dl \sin\theta}{4\pi r^2}$ <p>where $r = \sqrt{x^2 + a^2}$</p> $\therefore dB = \frac{\mu_0 I dl \sin 90^\circ}{4\pi (x^2 + a^2)}$ <p>And direction of \vec{dB} is \perp to the plane containing \vec{Idl} and \vec{r}.</p> <p>Resolving \vec{dB} along the x - axis and y - axis.</p> $dB_x = dB \sin\theta$ $dB_y = dB \cos\theta$ <p>taking the contribution of whole current loop we get</p> $B_x = \oint dB_x = \oint dB \sin\theta = \int \frac{\mu_0 I dl \sin\theta}{4\pi (x^2 + a^2)}$ $B_x = \frac{\mu_0 I}{4\pi (x^2 + a^2)^{3/2}} \oint dl = \frac{\mu_0 I \times 2\pi a}{4\pi (x^2 + a^2)^{3/2}}$ <p>And $B_y = \oint dB_y = \oint dB \cos\theta = 0$</p> $\therefore B_p = \sqrt{B_x^2 + B_y^2} = B_x = \frac{\mu_0 2IA}{4\pi (x^2 + a^2)^{3/2}}$ $\therefore \vec{B}_p = \frac{\mu_0 2m}{4\pi (x^2 + a^2)^{3/2}} (\because \vec{m} = I\vec{A})$ <p>For centre $x = 0$</p> $\therefore \vec{B}_p = \frac{\mu_0 2I\pi a^2}{4\pi a^3} = \mu_0 \left(\frac{I}{2a}\right)$ <p>in the direction of \vec{m}</p>	<p>1</p> <p>1/2</p> <p>1/2</p> <p>1</p>

30.	<p>∴ resonant frequency for LCR circuit is given by $\nu_0 = \frac{1}{2\pi\sqrt{LC}}$</p> $= \frac{1}{2 \times 3.14 \times \sqrt{3 \times 27 \times 10^{-8}}}$ $= 17.69 \text{ Hz}$ <p>Or $\omega_0 = 2\pi\nu_0 = 111 \text{ rad/s}$.</p> <p>∴ quality factor of resonance</p> $Q = \frac{\omega_0}{2\Delta\omega} = \frac{\omega_0 L}{R} = \frac{1}{R} \sqrt{\frac{L}{C}}$ $\therefore Q = \frac{1}{7.4} \sqrt{\frac{3}{27 \times 10^{-8}}} = 45.0$ <p>To improve sharpness of resonance circuit by a factor 2, without reducing ω_0; reduce R to half of its value i.e. $R = 3.7\Omega$</p>	1 1 1
31.	 <p>Two conditions for TIR –</p> <p>(a) Light must travel from denser to rarer medium</p> <p>(b) $i > i_c$</p> $\therefore \sin i_c = \frac{1}{\mu}$ $\therefore (i_c)_{\text{Red}} = \sin^{-1}\left(\frac{1}{1.39}\right) = 46^\circ$ $(i_c)_{\text{Green}} = \sin^{-1}\left(\frac{1}{1.42}\right) = 44.8^\circ$ $(i_c)_{\text{Blue}} = \sin^{-1}\left(\frac{1}{1.48}\right) = 43^\circ$ <p>∴ Angle of incidence at face AC is 45° which is more than the critical angle for Blue and Green colours therefore they will show TIR but Red colour will refract to other medium.</p>	1 1 1
32.	<p>Resolving power (R.P) of an astronomical telescope is its ability to form separate images of two neighboring astronomical objects like stars etc.</p> $\text{R.P.} = \frac{1}{\theta} = \frac{D}{1.22\lambda}$ <p>where D is diameter of objective lens and λ is wave length</p>	1

of light used.

$$D = 100\text{inch} = 2.54 \times 100\text{cm} = 254\text{cm} \\ = 2.54\text{m}$$



$$\lambda = 6000\text{\AA}$$

$$\text{Limit of resolution } d\theta = \frac{1.22\lambda}{D} \\ = \frac{1.22 \times 6000 \times 10^{-10}\text{m}}{254 \times 10^{-2}\text{m}} \\ = 2.9 \times 10^{-10}$$

OR

Basic assumptions in derivation of Lens-maker's formula:


- (i) Aperture of lens should be small
- (ii) Lenses should be thin
- (iii) Object should be point sized and placed on principal axis.

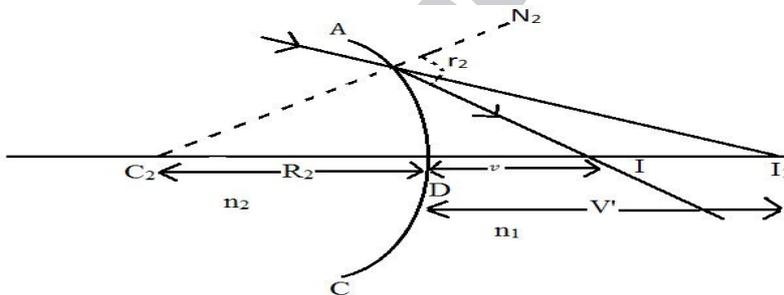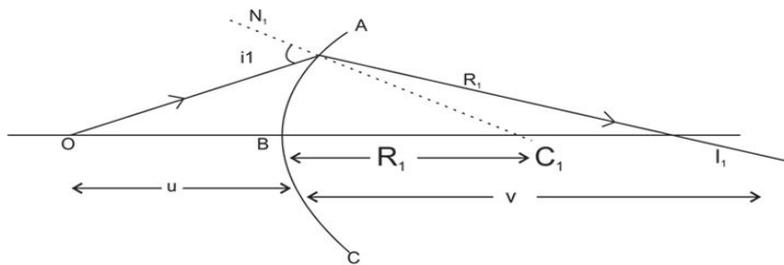

Suppose we have a thin lens of material of refractive index n_2 , placed in a medium of refractive index n_1 , let o be a point object placed on principle axis then for refraction at surface ABC we get image at I_1 ,


$$\therefore \frac{n_2}{v} - \frac{n_1}{u} = \frac{n_2 - n_1}{R_1} \text{ -----(1)}$$

But the refracted ray before goes to meet at I_1 falls on surface ADC and refracts at I_2

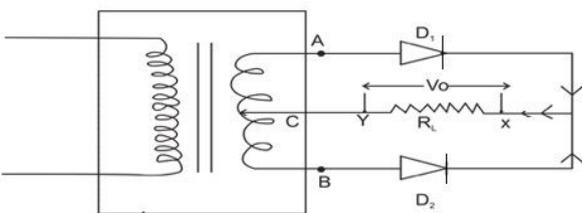	<p>finally; hence I_1 works as a virtual object 2nd refracting surface</p> $\therefore \frac{n_2}{V} - \frac{n_2}{V'} = \frac{n_2 - n_1}{R_2} \text{----- (2)}$ <p>Equation (1) + (2)</p> $\frac{n_1}{V} - \frac{n_1}{u} = (n_2 - n_1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right)$ $\therefore \frac{1}{V} - \frac{1}{u} = (n_{21} - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \text{----- (3)}$ <p>If $u = \infty, v = f$</p> $\frac{1}{f} = (n_{21} - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \text{----- (4)}$ <p>Which is lens maker's formula.</p>	1
33.	${}_{92}^{238}\text{U} \rightarrow {}_{91}^{237}\text{Pa} + {}_1^1\text{H} + Q$ $\therefore Q = [M_U - M_{Pa} - M_H] c^2$ $= [238.05079 - 237.05121 - 1.00783] \text{u} \times c^2$ $= -0.00825 \text{u} \times 931.5 \frac{\text{MeV}}{\text{u}}$ $= -7.68 \text{MeV}$ <p>$\therefore Q < 0$; therefore it can't proceed spontaneously. We will have to supply energy of 7.68MeV to ${}_{92}^{238}\text{U}$ nucleus to make it emit proton.</p>	1 1 1
34.	<p>Circuit Diagram</p>  <p>One possible answer: Change the connection of R from point C to point B.</p> <p>Now No Current flowing through D_2 in the second half.</p> <p>1 mark for any correct diagram 2 marks for correct explanation</p>	1 2

Section - D

35.
(a)

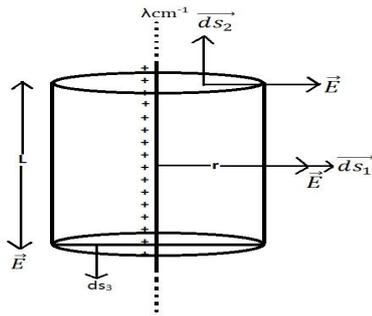

According to Gauss's law -

$$\oint \vec{E} \cdot d\vec{s} = \frac{1}{\epsilon_0} \{q\}$$

$$\int \vec{E} \cdot d\vec{s}_1 + \int \vec{E} \cdot d\vec{s}_2 + \int \vec{E} \cdot d\vec{s}_3 = \frac{1}{\epsilon_0} (\lambda L)$$

$$\int E ds_1 \cos 0 + \int E ds_2 \cos 90^\circ + \int E ds_3 \cos 90^\circ = \frac{\lambda L}{\epsilon_0}$$

$$E \int ds_1 = \frac{\lambda L}{\epsilon_0}$$

$$E \times 2\pi r L = \frac{\lambda L}{\epsilon_0}$$

$$E = \frac{\lambda}{2\pi \epsilon_0 r}$$


$$\vec{E} = \frac{\lambda}{2\pi \epsilon_0 r} \hat{r}$$

1

1

1

35.
(b)

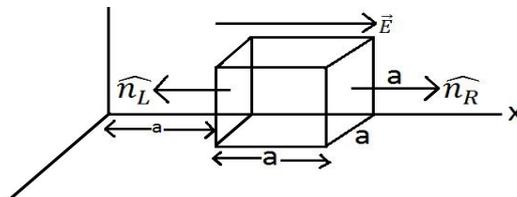

$$\because E_x = \alpha x = 400x$$

$$E_y = E_z = 0$$

Hence flux will exist only on left and right faces of cube as $E_x \neq 0$

$$\because \vec{E}_L \cdot a^2 \hat{n}_L + \vec{E}_R \cdot a^2 \hat{n}_R = \frac{1}{\epsilon_0} \{q_{in}\} = \phi$$

$$- E_L \cdot a^2 \hat{n}_L + a^2 E_R = \phi_{Net}$$

$$\phi_{Net} = -(400a)a^2 + a^2 (400 \times 2a)$$

$$= -400a^3 + 800a^3$$

$$= 400a^3$$

$$= 400 \times (1)^3$$

$$\phi_{Net} = 0.4 \text{ Nm}^2\text{c}^{-1}$$

1

$$\therefore \phi_{Net} = \frac{1}{\epsilon_0} \{q_{in}\}$$

$$\begin{aligned} \therefore q_{in} &= \epsilon_0 \phi_{Net} \\ &= 8.85 \times 10^{-12} \times 0.4 \\ &= 3.540 \times 10^{-12} \text{C} \end{aligned}$$

1

OR


- (a) Definition of electrostatic potential – SI unit J/c of Volt.
Deduction of expression of electrostatic potential energy of given system of charges –

1

2

$$U = \frac{1}{4\pi\epsilon_0} \left[\frac{q_1 q_2}{r_{12}} + \frac{q_1 q_3}{r_{13}} + \frac{q_2 q_3}{r_{23}} \right]$$


- (b)

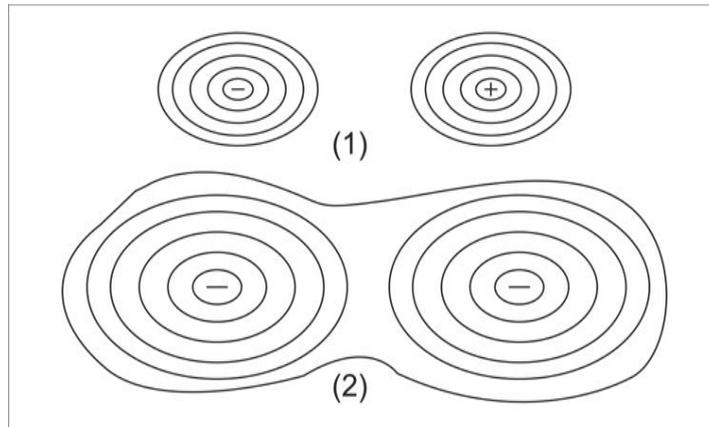

1

1

36. For forward motion from $x = 0$ to $x = 2b$.
The flux ϕ_B linked with circuit SPQR is

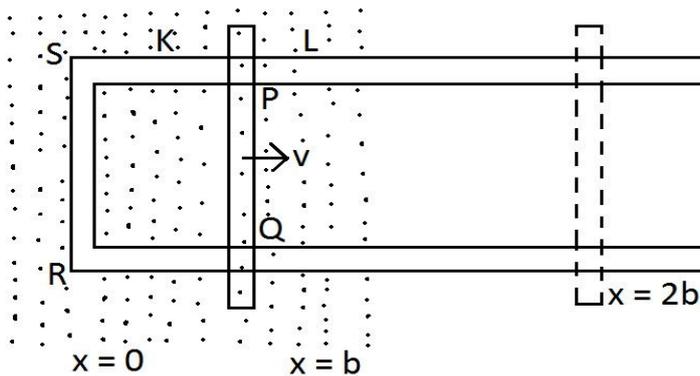

$$\phi_B = Blx \quad 0 \leq x < b$$

$$Blb \quad b \leq x < 2b$$

The induced emf is,

$$e = \frac{-d\phi_B}{dt}$$

$$e = -Blv \quad 0 \leq x < b$$

$$= 0 \quad b \leq x < 2b$$

When induced emf is non-zero, the current I in the magnitude;

$$I = \frac{e}{r} = \frac{Blv}{r}$$

The force required to keep arm PQ in constant motion is $F = IlB$. Its direction is to the left. In magnitude

$$F = IlB = \frac{B^2 l^2 v}{r} ; \quad 0 \leq x < b$$

$$= 0 ; \quad b \leq x < 2b$$


The Joule heating loss is


$$P_j = I^2 r$$


$$= \frac{B^2 l^2 v^2}{r} \quad 0 \leq x < b$$

$$= 0 \quad b \leq x < 2b$$

One obtains similar expressions for the inward motion from $x = 2b$ to $x = 0$

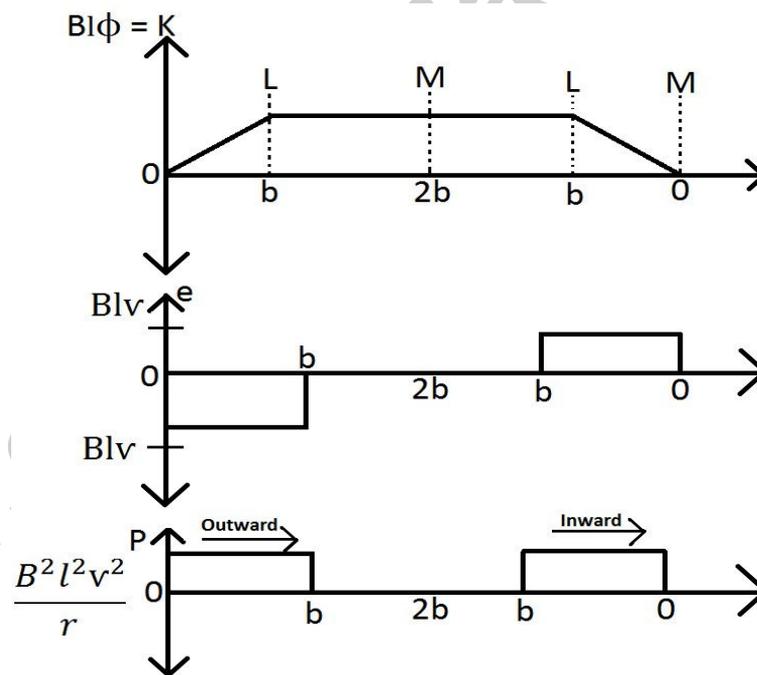

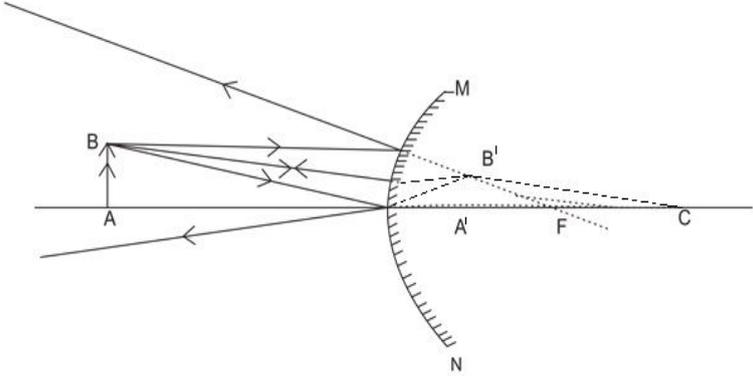	OR	
	Working principle of cyclotron Diagram Working of cyclotron with explanation Any two applications	1 1 2 1
37.	 <p>Deduction of mirror formula</p> $\frac{1}{v} + \frac{1}{u} = \frac{1}{f}$ <p>For a convex mirror f is always +ve.</p> $\therefore f > c$ <p>Object is always placed in front of mirror hence $u < 0$ (for real object)</p> $\frac{1}{v} + \frac{1}{u} = \frac{1}{f}$ $\Rightarrow \frac{1}{v} = \frac{1}{f} - \frac{1}{u}$ <p>As $u < 0$ u -ve hence</p> $\frac{1}{v} > 0$ <p>$\Rightarrow v > 0$ i.e. +ve for all values of u.</p> <p>Image will be formed behind the mirror and it will be virtual for all values of u.</p>	1 2 1 1
	OR	
37. (a)	Ray Diagram : (with proper labeling)	1

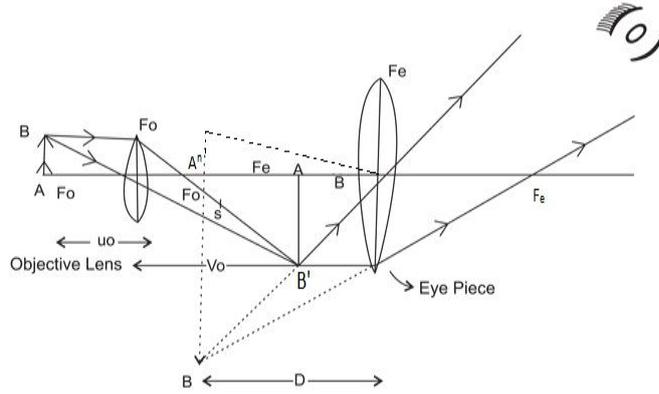

$$\text{Magnifying power } m = \frac{V_o}{u_o} \left(1 + \frac{D}{f_e} \right)$$

$$m = \frac{L}{f_o} \left(1 + \frac{D}{f_e} \right)$$

1

37. $\therefore m = m_o, m_e = -30$ (virtual, inverted)

(b)

$$\therefore f_o = 1.25 \text{ cm}$$

$$f_e = 5.0 \text{ cm}$$

Let us setup a compound microscope such that the final image be formed at D, then

$$m_e = 1 + \frac{v}{f_e} = 1 + \frac{25}{5} = 6$$

and position of object for this image formation can be calculated -

$$\frac{1}{v_e} - \frac{1}{u_e} = \frac{1}{f_e}$$

$$\frac{1}{-25} - \frac{1}{u_e} = \frac{1}{5}$$

$$-\frac{1}{u_e} = \frac{1}{5} + \frac{1}{25} = \frac{6}{25}$$

$$u_e = \frac{-25}{6} = -4.17 \text{ cm.}$$

$$\therefore m = m_o \times m_e$$

$$\therefore m_o = \frac{+V_o}{u_o} = \frac{-30}{6} = -5$$

$$\therefore V = -5u_o$$

$$\frac{1}{V_o} - \frac{1}{u_o} = \frac{1}{f_o}$$

$$\frac{1}{-5u_o} - \frac{1}{u_o} = \frac{1}{1.25}$$

1

1

	$\frac{-f}{u_o} = \frac{1}{125}$ $u_o = -1.5\text{cm} \Rightarrow v_o = 7.5\text{cm}$ $\text{Tube length} = v_o + u_e = 7.5\text{cm} + 4.17\text{cm}$ $L = 11.67\text{cm}$ <p>Object should be placed at 1.5cm distance from the objective lens.</p>	1
--	--	---

www.careerindia.com